



DISHWASHER S-61

Commercial dishwasher with constant rinse temperature system



WARE WASHING
COMMERCIAL DISHWASHERS



FEATURES AND BENEFITS

- ✓ **Constant temperature rinse water system: guaranteed sterilization of all ware to NSF specifications.**
- ✓ **Independent break tank.**
- ✓ **Rinse booster pump (minimum water pressure: 0,7bar; 7l/min).**
- ✓ Intuitive use.
- ✓ Top and bottom wash arms.
- ✓ Highly efficient, 1HP wash pump.
- ✓ Catering grade stainless steel construction (AISI 304 2B).
- ✓ Double skinned door equipped with magnetic micro-switch and high-efficiency seal, ensuring thermal and acoustic insulation.
- ✓ Rounded finish interior ensures no accumulation of dirt.
- ✓ Completely rounded, stainless steel wire rack support and guide.
- ✓ Electronic, watertight control panel with wash and rinse temperature display.
- ✓ 3 washing cycles.
- ✓ Highly efficient stainless steel dispersers ensure optimum water distribution for enhanced washing performance.
- ✓ Rinsing dispersers offer clean design. Assembly without screws.
- ✓ Double filter system provides effective wash pump protection.
- ✓ Easily removable dispersers and filters for cleaning and maintenance. No tools needed.
- ✓ Independent rinse boiler complete with adjustable and safety thermostats.
- ✓ Tank equipped with adjustable thermostat.
- ✓ Designed for quick and easy maintenance. Fast access to components for on-site maintenance.
- ✓ 100% tested.

SALES DESCRIPTION

Constant rinse temperature system gives hygienic sanitised results. Suitable for hospitals, clinics, nurseries, laboratories, etc. and ideal for glass washing in the hotel & leisure industry.

- ✓ Best performance.
- ✓ Optimal washing results.
- ✓ Sturdy and reliable.
- ✓ Double skinned construction: thermal and acoustic insulation.
- ✓ 2.5 kW wash tank: optimal recovery time.
- ✓ Full optional list.

INCLUDES

- ✓ Type A Air Break.
- ✓ Rinse aid pump.
- ✓ 1 open basket.
- ✓ 1 plate basket.
- ✓ 1 small cutlery basket.

ACCESSORIES

- Stands for glass- and dishwashers
- Filters for dishwashers
- Dosing equipments
- Manual water softeners
- Automatic water softeners
- Sink units: worktops
- Frames for dishwashers
- 500 x 500 mm. baskets
- Inserts, supplements & similar
- High Feet Kit



sammic | www.sammic.com
Food Service Equipment Manufacturer

Polígono Basarte, 1. phone +34 943 15 72 36
20720 Azkoitia, Spain sales@sammic.com



Project	Date
Item	Qty
Approved	

product sheet
updated 14/11/2019



DISHWASHER S-61

Commercial dishwasher with constant rinse temperature system



SPECIFICATIONS

Basket dimensions: 500 mm x 500 mm

Maximum glass height: 330 mm

Cycle duration: 120 " / 150 " / 180 "

Production baskets/hour: 30 / 24 / 20

Wash temperature: 65 °C

Rinse temperature: 90 °C

✓ Boiler capacity: 12 l

✓ Wash tank capacity: 25 l

✓ Water consumption/cycle: 3.5 l

✓ Loading

✓

✓ Pump: 750 W / 1 Hp

✓ Tank: 2500 W

✓ Boiler: 6000 W

✓ Total loading: 6750 W

External dimensions (WxDxH)

✓ Width: 600 mm

✓ Depth: 630 mm


✓ Height: 835 mm

Net weight: 63 Kg

Noise level (1m.): <70 dB(A)

Crated dimensions

640 x 695 x 960 mm

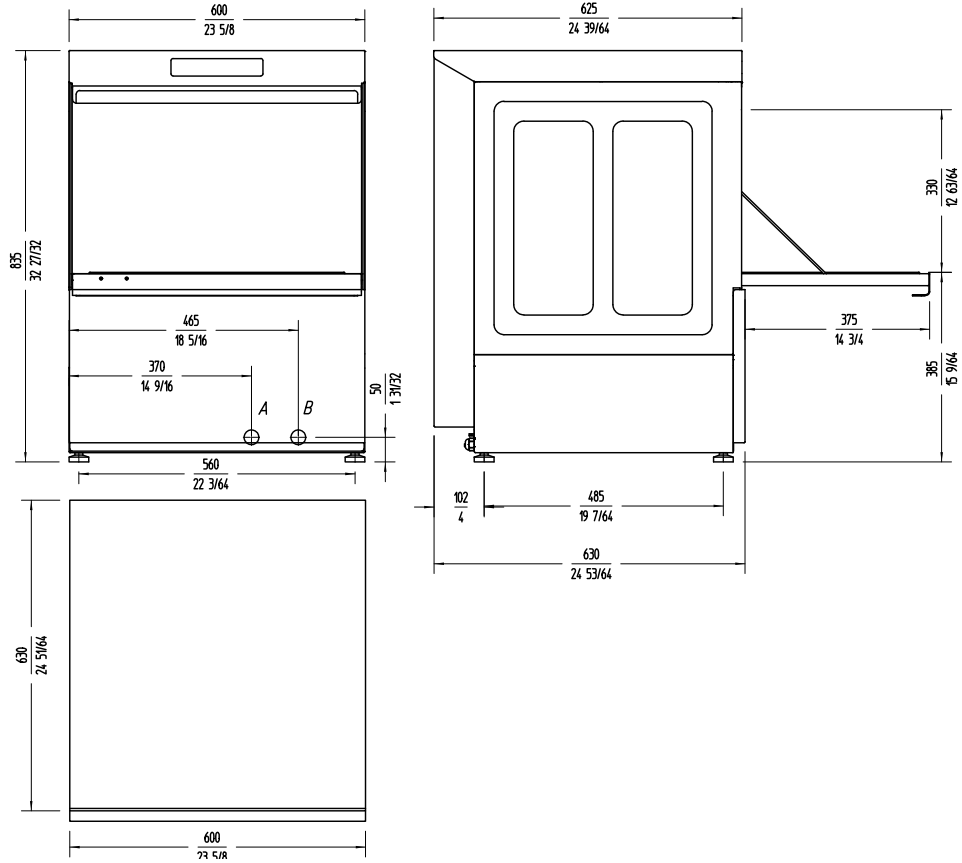

AVAILABLE MODELS

- 1302164 Dishwasher S-61 400/50/3N
- 1302165 Dishwasher S-61B 400/50/3N (with drain pump)
- 1302176 Dishwasher S-61 230/50/1
- 1302177 Dishwasher S-61B 230/50/1 (with drain pump)
- 1302174 Dishwasher S-61 400/50/3N DD
- 1302175 Dishwasher S-61B 400/50/3N DD (with drain pump)
- 1302178 Dishwasher S-61 230/50/1 DD
- 1302179 Dishwasher S-61B 230/50/1 DD (with drain pump)

* Ask for special versions availability

sammic | www.sammic.com
Food Service Equipment Manufacturer

Polígono Basarte, 1. phone +34 943 15 72 36
20720 Azkoitia, Spain sales@sammic.com



Project	Date
Item	Qty
Approved	

WARE WASHING
COMMERCIAL DISHWASHERS

product sheet
updated 14/11/2019