

# PASS-THROUGH DISHWASHER UX-120CV

Rack size 500 mm x 500 mm and door clearance 430 mm.



# SALES DESCRIPTION

Sani-Control: guaranteed disinfection

Exclusive Hydroblade™ washing arms: maximum effectiveness.

3-stage filtering system.

Steam condenser: environmental improvement and energy efficiency.

#### Sani-Control guarantee

- GUARANTEED DISINFECTION in compliance with standard DIN 10534.
- √ THERMAL LOCK function: Ensures that rinsing will be carried out at the ideal temperature to disinfect the dishes.
- ✓ CONSTANT HIGH TEMPERATURE RINSE system for optimal disinfection.
- √ The PRESSURE PUMP guarantees effective high-pressure rinsing
- √ WRAS certified.

#### Steam condenser

- ✓ Reduces the steam released into the installation by 75%.
- √ Factory-integrated condenser module, no installation required.

### New recessed bodywork

- ✓ Ergonomic design with rounded corners to prevent the accumulation of dirt and facilitate cleaning.
- Compact tank volume (50% water saving compared to the previous range).

#### Hydroblade™ washing arms

- Redesigned nozzles for greater washing performance.
- The "monoblock" design delivers durability and resistance to im-
- 30% savings in water consumption during rinsing compared to the previous range.

3-stage filter system: surface, tank and extraction



Keeps the washing water in optimal conditions to maintain constant washing performance.

## **Designed to last**

- "Flow" opening mechanism: allows the hood to be raised with less effort
- √ High load capacity 43 cm: suitable for GN 1/1 and Euronorm
- Stainless steel surface filters for greater stability and resistance durina intensive use

#### Premium warewashing

- √ Soft start: progressive start-up of the washing pump to protect fragile items.
- √ Colour LCD Display: intuitive communication of the machine status by means of messages, colour codes and icons.
- Dedicated cycles: selection of the ideal washing programme using
- √ Adaptable: allows the main parameters of the machine to be adjusted to the needs of each user.
- √ TEMPERATURE DISPLAY
- √ Wash Plus+ function: increases the intensity of the wash cycle for greater cleaning performance
- Control panel with IP65 humidity protection.

#### You will never WASH ALONE

- Tech-Services: our team of technicians will help you so that your machine is always ready for use.
- ✓ Design Services: tell us what your needs are and we will advise you.
- √ 60 years of experience and know-how at your disposal.

#### **NCLUDES**

- ✓ Rinse aid pump.
- 1 glasses basket.
- √ 1 mixed basket (plates).
- √ 1 cutlery basket.
- ✓ Drainage pump with level sensor. Proactive tank water renewal.

## **OPTIONAL**

- Detergent dosing kit.
- ☐ Automatic resin regenera-

tion water softener with salt detector.

## ACCESSORIES

- ☐ Tables for pass-through dishwashers
- Manual water softeners
- Automatic water softeners
- ☐ 500 x 500 mm baskets
- ☐ Inserts & supplements
- Central sorting tables
- Double connection central sorting table
- Prewashing tables for pass-through and rack conveyor dishwashers
- Connecting tables for pass-through dishwashers and rack conveyors
- ☐ Reverse osmosis devices OS-140
- ☐ Dosing equipments for AX / UX hood-type dishwashers

## **SPECIFICATIONS**

Basket dimensions: 500 mm x 500 mm Useful height: 430 mm

Cycle duration: 60/90/100/150/210" Production baskets / hour: 60/40/36/24/17

Boiler capacity: 12 I Wash tank capacity: 25 I

#### Consumption and savings

✓ Automatic saving mode in: 25'



# **PASS-THROUGH DISHWASHER UX-120CV**

Rack size 500 mm x 500 mm and door clearance 430 mm.

✓ Automatic switch-off: 120'

#### Loading

✓ Pump: 1000 W / 1.3 Hp

√ Tank: 2500 W

✓ Boiler: 9000 W

√ Total loading: 10000 W

### External dimensions (W x D x H)

✓ Width:650 mm (Wide with handle: 725 mm)

✓ Depth: 755 mm (Bottom with handle: 835 mm)

√ Height: 2035 mm / 2035 mm

Net weight: 137 kg

Rinse temperature: 87°C Noise level (1m.): <70 dB(A)

## **Crated dimensions**


760 x 860 x 2050 mm

# **AVAILABLE MODELS**

1303373 UX-120BCV 220/60/3 DD

1303378 UX-120BCDV 220/60/3 DD

\* Ask for special versions availability

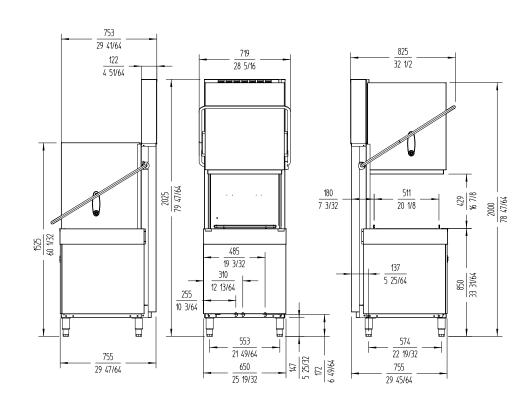



Polígono Basarte, 1. 20720 Azkoitia, Spain phone +34 943 15 72 36 sales@sammic.com



Project	Date
Item	Qty

Approved